

# ZS-CCV... New Control Valve Weather Shield




## Installation Instructions



Weather shield for PICCV/CCV to provide protection for actuators in outdoor applications.

### APPLICATION

The ZS-CCV... weather shield provides moderate protection for valves which are mounted outdoors. This product is designed as a water tight enclosure. The housing allows easy mounting over the actuator, while allowing easy viewing of the actuator in operation.

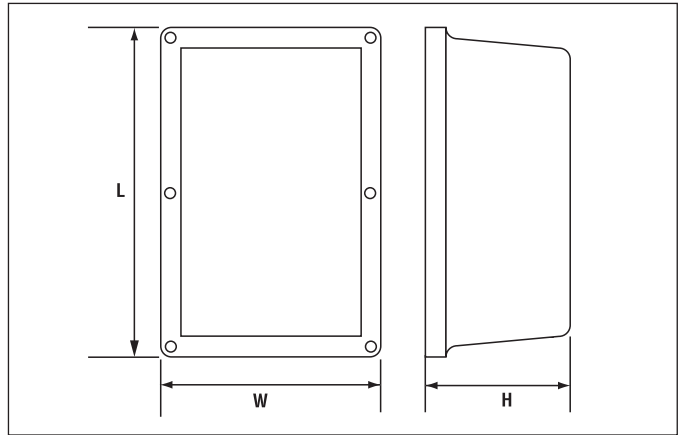

### Specifications

Cover	PETG with UV resistant smoke tint
Perimeter Gasket	Silicon Rubber
Rubber Gasket	Silicon Rubber
Spring Clips	Stainless Steel
Temperature limitations:	-22°F to 122°F (-30°C to 50°C)
Plate (ZS-CCV-100)	Aluminum
Plate	Galvaneal w/black powder coat

Part Number	L	W	H
ZS - CCV - 60	10" [254]	7.75" [197]	4" [100]
ZS - CCV - 90	16.25" [413]	8.75" [222]	4.5" [114]
ZS - CCV-100	15.67" [398]	7.61" [193]	4.0" [102]

	LR (B) (X) (CX)	AR (X) (CX)	LF	AF	List Price
<b>WEATHER SHIELDS*</b>					
ZS-CCV-60 Pressure Independent Characterized Control Valves™ (PICCV)			●		●
ZS-CCV-90 Pressure Independent Characterized Control Valves™ (PICCV)				●	●
ZS-CCV-100 Pressure Independent Characterized Control Valves™ (PICCV)	●	● with CCV EXT-KIT			●

\*Designed for NEMA 4 specifications

### PARTS LIST

Cover including Rubber Perimeter Gasket, Rubber Gasket  
Back Plate  
Anti-Rotation Post with screw and lock washer  
Valve Gasket

Assorted Cap plugs for unused holes  
Screws: LF - 2 screws provided  
AF - 2 bolts with nylon insert locking nuts  
LR(B)(X)(CX), AR(X)(CX) - 1 screw, 1 washer